

# Flex-Share Charging Station

## CSE-1615



## Cable Management Guide

## **WARNINGS:**

Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty. It is the installer's responsibility to make sure all mounting systems are properly assembled and installed using the instructions provided.

Failure to provide adequate structural strength for this mounting system can result in serious personal injury or damage to equipment. It is the installer's responsibility to make sure the structure to which this mounting system is attached can support five times the combined weight of all equipment. Reinforce the structure as required before installing the mounting system. Any wall to which the mount is being attached may have a maximum drywall thickness of 5/8" (1.6cm).

Exceeding the weight capacity can result in serious personal injury or damage to equipment. It is the installer's responsibility to make sure the combined weight of all components attached to this mount does not exceed 100 lbs.

Do not stack more than two units. Only use manufacturer supplied stacking hardware and follow instructions included with stacking hardware for installation.

Use this mounting system only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.

Never operate this mounting system if it is damaged. Contact JAR Systems for replacement or repair.

This unit must always be used by adults or with adult supervision.

Do not use this unit outdoors.

Liquids should not be stored in, set on, or placed inside this unit.

**If the unit is being used or transported on an AV cart or charging cart, the unit must be secured down to the cart.**

## **WARRANTY:**

This product comes with a five-year warranty that covers any defects in material or workmanship and extends to the original consumer of the product only. JAR Systems LLC will replace the product with a new or refurbished product, repair the product, send replacement parts, or refund the purchase price of the product, at JAR Systems LLC's discretion. This warranty does not cover accidental damage, unreasonable use, neglect, tampering or other causes not arising from defects in material or workmanship.

Any implied warranties last only as long as the warranty periods listed above except where state law does not allow limitations on how long an implied warranty lasts. This includes but is not limited to the implied warranties of merchantability and fitness. JAR Systems LLC's responsibility is limited to the actions listed above and nothing else.


This warranty does not cover, and JAR Systems, LLC will not be responsible for, any damages due to loss of use of the product, or any other costs or expenses incurred by you or anyone else who uses the product, whether due to defects, breach of contract, negligence, strict liability or otherwise. JAR Systems is not liable for any indirect, special, incidental or consequential damages related to the product or this warranty. Some states do not allow exclusions or limitations on consequential or incidental damages, so these limitations or exclusions may not apply.

This warranty gives you specific legal rights and you may also have other rights that vary from state to state. This warranty is governed by the laws of Florida, excluding its conflict of laws principles, unless your state requires that its law be used.

# Installing the Power Strip

## REVERSIBLE POWER STRIP

The power strip can be mounted on either the front or back side by reversing the mounting brackets. Loosen the three screws on each side, rotate the bracket, and replace the screws.

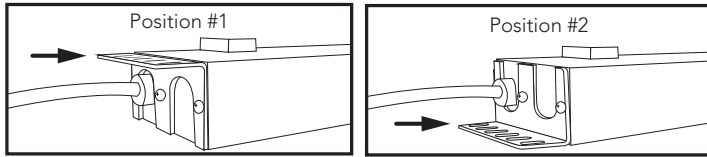


Install the power strip in one of three possible positions with 4 screws and nuts.

**Position 1:** Recommended for most usage for wall or desk installations: Power strip is positioned on the **inside** of the unit with outlets facing in through the opening in the back.


**Position 2:** Alternative position for desktop usage: Power strip is positioned on the **outside** of the unit with outlets facing in through the opening in the back.

**Position 3:** Alternative position for wall-mount usage: Power strip is mounted to bottom side of chassis with outlets facing upward.

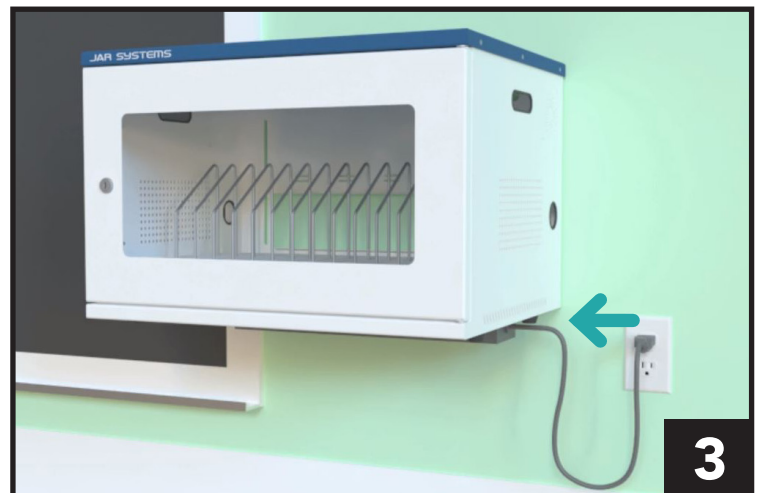


# Installing Charging Cables and Adapters

**Step 1:** Place a security screw in the side of the chassis **(A)** to hold the tray open during the wiring process.

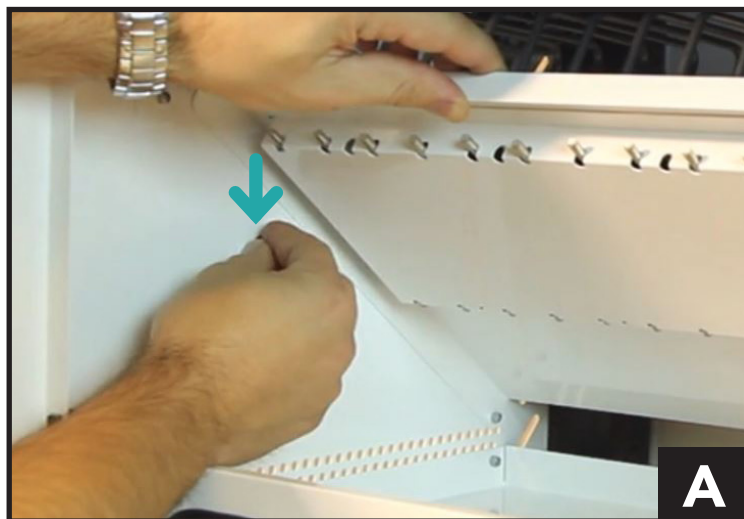


**Step 2:** Determine the length of cable that is needed to reach from the tray to the devices **(B)**.

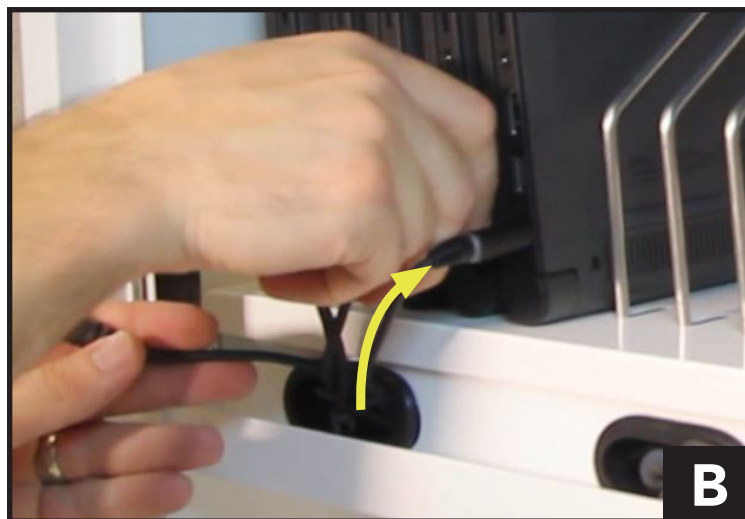

**Step 3:** Determine the best method of arranging the cables that come with your device (figures **C, D, E** below).


## AC ADAPTERS FRONT TO BACK

Best for some wider adapters.

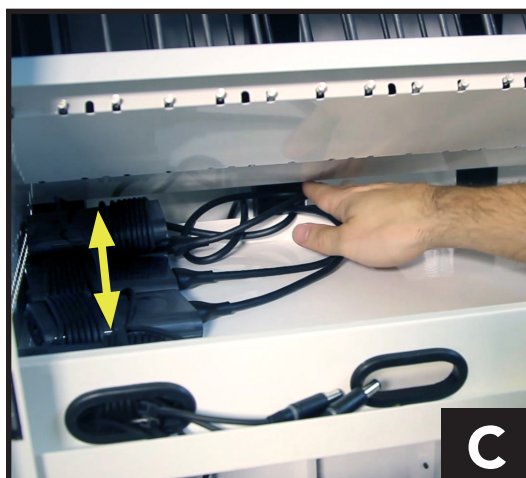


## AC ADAPTERS LEFT TO RIGHT

Best for some narrower adapters.

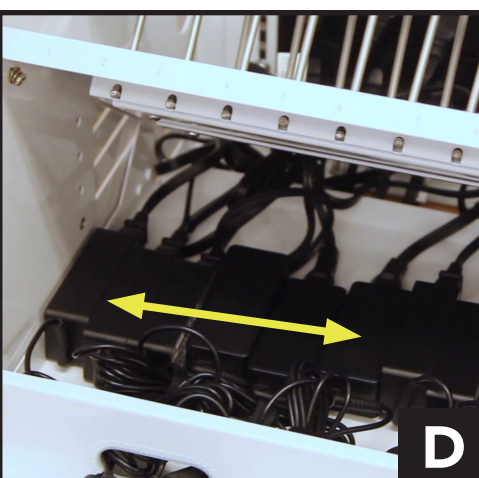

## TABLET (NO AC ADAPTER)

Use provided clips beneath shelf to secure cables in groups of 5-6.

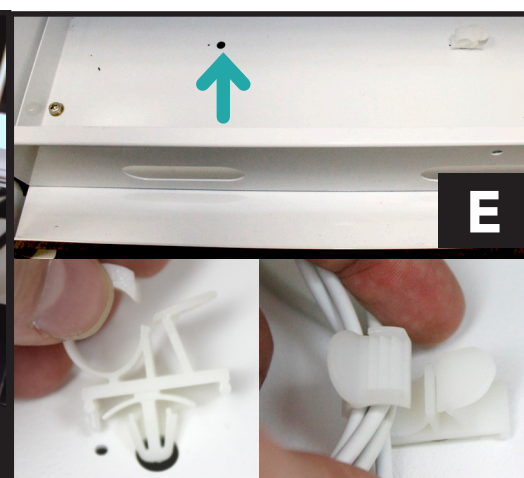

**Step 4:** Arrange adapters in decided configuration, leaving just enough cable length sticking out of the port to plug in the devices.

**TIPS:**

- Adapters can often be installed just as they come bundled in the box. For example, the adapter in figure **(F)** comes with the cable wrapped around the adapter and it works out nicely when installed in that condition. If the cables are not bundled at all, twist ties or Velcro ties may be helpful.
- If the devices have particularly large AC adapters (approximately 5" x 2" x 1.25") the adapters will fit more snugly in the tray. In this case it may be best to arrange the majority of the adapters as far back in the tray as possible from left to right, flipping about half on their side. Contact JAR Systems for additional assistance.

**Step 5:** Plug the charger into the power strip. For best results, bundle any excess cable length if it is not already **(G)**.

**Step 6:** (OPTIONAL) Place a security screw in the center of the shelf to prevent adapters from being removed or tampered with **(H)**.

