

Elevate Evo 36 USB-C Charging Cart

JAR SYSTEMS

MPN: MC-7136-EVO

Higher Capacity Charging for Multiple Devices

More Devices, Less Hassle

High-capacity, secure bays keep large device fleets protected, organized, and ready for fast distribution and collection.

Power Within Easy Reach

External AC and USB-C ports provide power access, so compatible devices can be used or charged with the cart closed.


Intelligent USB-C PD Charging

Quick-Sense Evo dynamically distributes power to efficiently charge USB-C devices up to 65W* without messy AC adapters.

Surprisingly Compact Design

Designed for any classroom, with 270° doors that fold completely flat for wide-open access without taking up valuable space.

Take a look inside

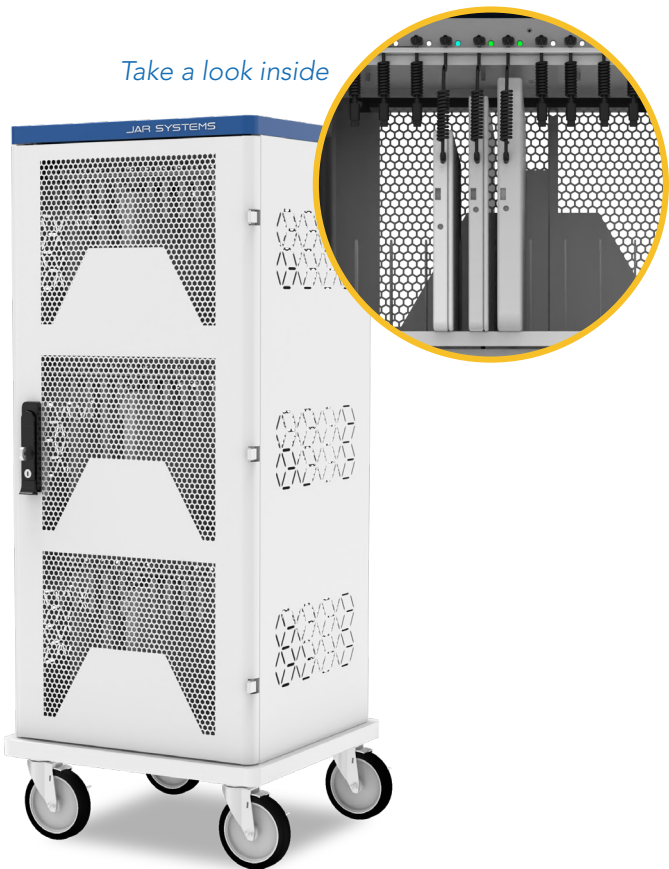

Key Features

- 36 numbered device bays
- Quick-Sense Evo USB-C PD charging with intelligent power distribution
- Up to 65W* per port
- Pre-installed coiled USB-C cables
- Front-access charging hubs with LED charging-status indicators
- External USB-C charging port
- AC adapter-free charging
- Secure device storage
- Durable steel construction with swivel casters
- Integrated electrical and thermal protection

Charging Compatibility	USB-C devices requiring up to 65W*, including Chromebooks, tablets, and laptops	Dimensions	49.37"H x 20.35"W x 19.29"D
Device Capacity	36 devices / 12 devices per shelf	Input (AC)	100–240V~, 50/60Hz, 5A max (per hub) / 15A max (cart total)
Max Device Size	10.83"H x 1.37"W x 15.24"D Fits select devices up to 17" screen size	Output (DC)	5V=3A; 9V=3A; 15V=3A; 20V=3.25A (65W* max per port) 390W maximum output per hub 1170W maximum system output
Included	Cart frame, (3) 12-port Quick-Sense Evo USB-C Charging Hubs, (36) USB-C male-to-male coiled connector cables		
Warranty	Lifetime on mechanical and structural components. 2 years on electrical components. 1 year on charging cables including ADP. Optional after-warranty product protection plans available.		

*Higher-powered devices may also be supported, depending on device specifications and charging protocols. Contact JAR Systems for compatibility guidance.