






A

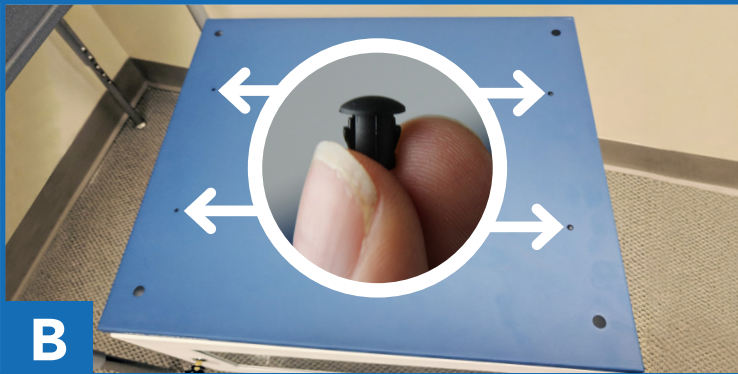

B

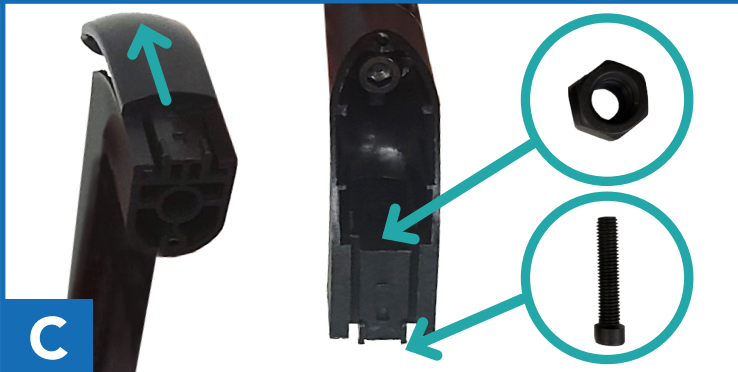

C

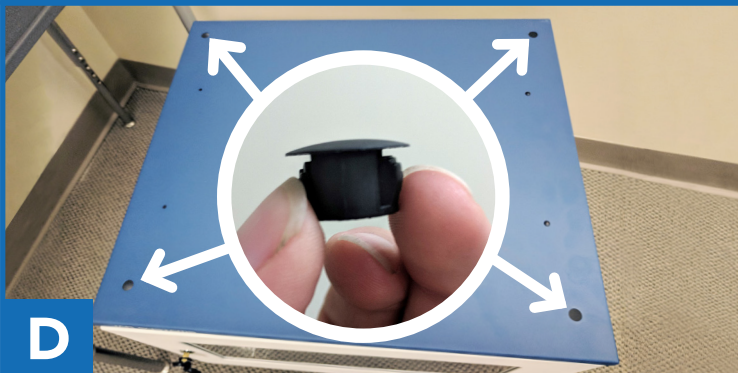

D



E

INSTALLING CASTERS

1. Place the unit on its side. Make sure the locks are engaged on all four casters. Secure each caster to the bottom using four bolts per caster. **(A)**

INSTALLING HANDLE

1. Determine which side of the unit you want to install the handle on and remove the two small black caps from that side. Squeeze the sides of the cap and push it out at the same time. Leave the two small black caps on the other side in the unit. **(B)**
2. Slide the removable covers on either side of the handle to be able to locate the holes for the screws.
3. Align the handle over the holes, reach inside the unit with one hand holding the bolt and Allen wrench and stick the bolt up through the bottom. With the other hand, thread the nut onto the bolt down to the two guides in the plastic handle to hold the bolt in place as it is tightened eliminating the need for a wrench, and tighten the bolt from below. **(C)**
4. Slide the removable covers back on either side of the handle to finish installing the handle.

NOTE: If you plan to stack two units, install the handle on the top unit.

STACKING TWO CHARGING STATIONS

1. Remove the black caps from the four larger holes in the top of the bottom unit. Squeeze the sides of the cap and push it out at the same time. **(D)**
2. Place the second unit on its side and insert the four rubber feet if they are not already installed.
3. Place the second unit on top of the first unit. Line up the holes in the bottom side of the top unit with the four larger holes in the top side of the bottom unit.
4. Insert the stacking screws into the holes from inside of the bottom unit. Screw in all four partially at first and, when they are all in, tighten them the rest of the way. **(E)**

